




CZ Service Manuals

RiD90105i

DPF Fluid for ES

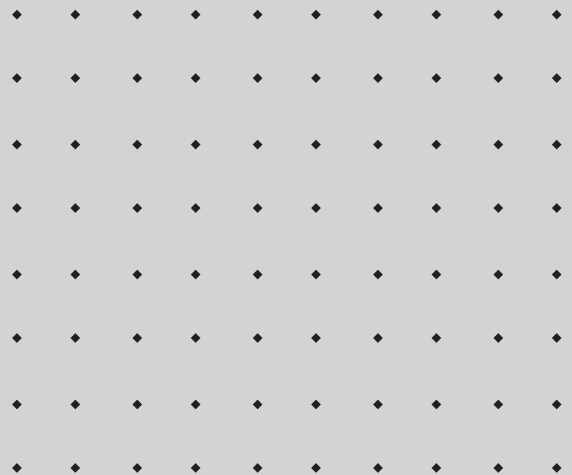

DPF-ES

DPF Adapter is bottled on the service port which is located before the DPF filter on the exhaust manifold. If a service port is not available then you can connect to the Landa (oxygen) sensor.

For the intake manifold you need to remove the air supply filter or depending on the engine configuration find the best way to access the intake throttle body where you should place the adapter by clamping it there and then run the system. In some engine configurations you can remove a rubber hose in order to have access to the port.

Always depends on the vehicle, set up 10sec pump on and 5sec pump off for 45min.

And then for smaller engines the duty cycle you can decrease for example 5sec on and 10sec off, for longer engines increase 15sec on and 5sec off. Recommended pressure: 1-1,5bars



Main Offices & Production Plant

364 Varis-Koropiou Ave. Koropi
194 42 Athens, Greece

Headquarters

A.I.S. GmbH
75438 Knittlingen, Germany

email contact@carbonzapp.com

tel +30 210 9856110

fax +30 210 9928655

carbonzapp.com